



MICROTHERM

PTC-Temperature-Sensors


PTC Thermistors, Motor-PTC

Single- and Triplet- Version

type

YAM

EF1

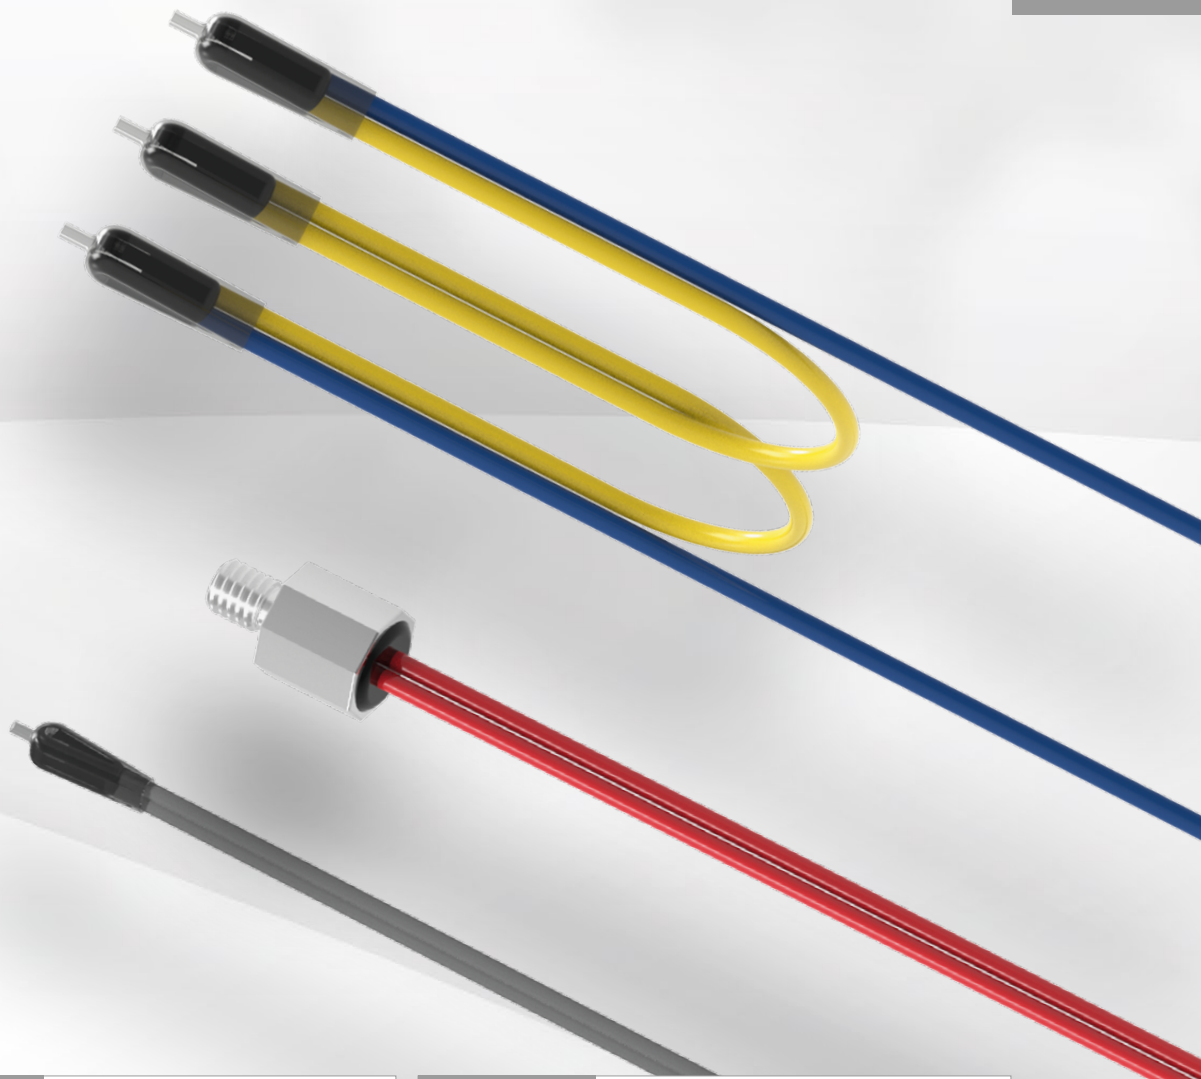

Applications

- Heavy-duty motors
- electric drives
- mechanical engineering

Benefits

- minimum size
- fast response characteristic
- single-, twin- and triplet- version

Description

PTC-temperature sensors are used for thermal protection of electric machinery and control cabinets, especially electric motors. The structure ensures a fast response time and a simple installation.

The function is obtained by a strong nonlinear PTC effect of the resistor. The usable range is ± 5 K around the nominal temperature. The evaluation is carried out by means of an electronics which detects the sudden increase in resistance and initiates a corresponding action (throttling, shutdown, etc.).

The thermistors are designated according to their nominal switch-off temperature T_{NAT} . Whereas the range below $T_{NAT}-20$ is not defined. Standards for single / triplet PTC thermistors are DIN 40081/40082.




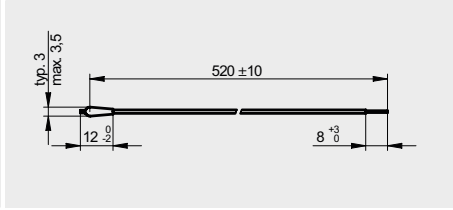
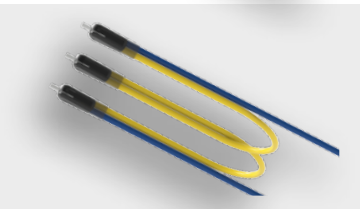
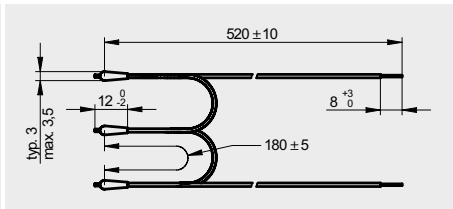
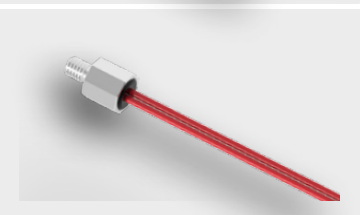
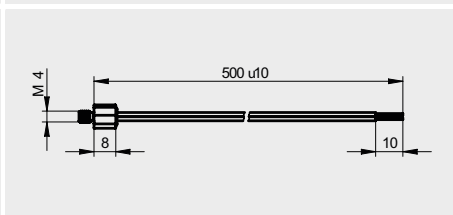
Technical data

Description	Dimensions	
	Single thermistor: YAM1, EF1	Triplet thermistor: YAM3
Nominal response temperature	80 °C ... 180 °C (add. 145 °C and 155 °C)	
Maximum allowable operating temp.	200 °C	
Maximum allowable operating voltage	25V (+25°C)	
Maximum allowable power dissipation	690 mW (+25 °C)	
Resistance R_{25}	$\leq 100 \Omega$	$\leq 300 \Omega$
Resistance at $T_{NAT} - 5$ K	$\leq 550 \Omega$	$\leq 1.650 \Omega$
Resistance at $T_{NAT} + 5$ K	$\geq 1.330 \Omega$	$\geq 3.990 \Omega$
Resistance at $T_{NAT} + 15$ K	$\geq 4.000 \Omega$	$\geq 12.000 \Omega$
Tolerance of T_{NAT}	± 5 K	± 5 K
Dielectric strength	2,5 KV AC	
Connection line	PTFE-insulated leads AWG26	
Length of connecting leads	520 mm \pm 10mm	520-180-180-520 mm \pm 10mm

YAM: PTC-pill with shrink tube and epoxy resin

EF1: PTC-pill with screw housing with M4- or M6-thread



Versions

type	illustration	drawing dimensions (mm)	technical specification
YAM1			shrink tube and epoxy resin
YAM3			shrink tube and epoxy resin
EF1			screw housing with M4- oder M6-thread

Identification color (leads)


type	T _{NAT} °C	YAM1, EF1: single-PTC standard ID-color	YAM3: triple-PTC standard ID-color
YAM EF1	80	white-white	white-yellow-yellow-white
	90	green-green	green-yellow-yellow-grün
	100	red-red	red-yellow-yellow-red
	110	brown-brown	brown-yellow-yellow-brown
	120	gray-gray	gray-yellow-yellow-gray
	130	blue-blue	blue-yellow-yellow-blue
	140	white-blue	white-yellow-yellow-blue
	145	white-black	white-yellow-yellow-black
	150	black-black	black-yellow-yellow-black
	155	blue-black	blue-yellow-yellow-black
	160	blue-red	blue-yellow-yellow-red
	170	white-green	white-yellow-yellow-green
180	red-white	red-yellow-yellow-white	

Temperature-resistance curve

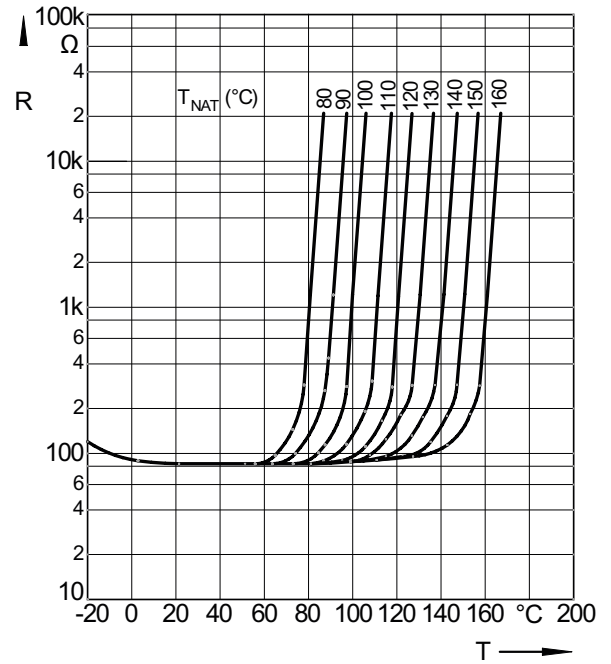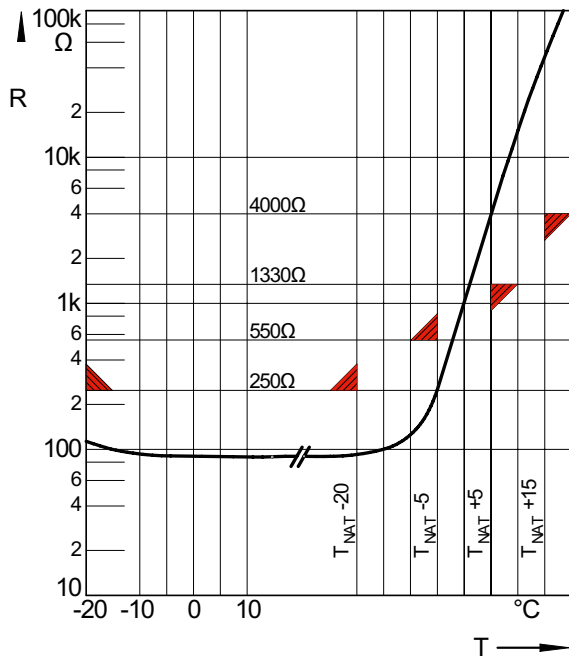

Ordering example

YAM3 120 05 520 180 180 520

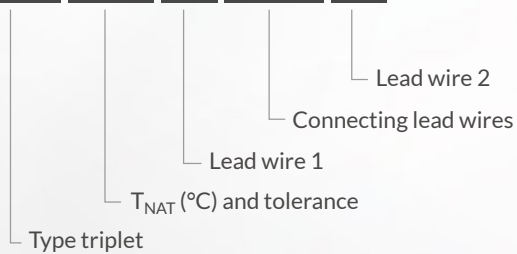

Also versions in twins are possible.
Deviations from the standard generally on request.

Microtherm GmbH

Taschenwaldstr. 3
75181 Pforzheim
Deutschland

Tel.: +49 7231 787-0
Fax: +49 7231 787-155

info@microtherm.de
www.microtherm.de

